

# Solar inverter

## Solar inverter ES-series

### Grid-connected

- ES2200 – 2000 watt
- ES3300 – 3000 watt
- ES4200 – 4000 watt
- ES5000 – 5000 watt

The EFFEKTA® ES solar inverters with an output power of 2000 up to 5000 Watt are ideally suitable for several solar modules. With its robust assembly in dustproof IP 65 cabinet, the application range is nearly unlimited.




### Features


- Transformer-less with high efficiency (96%)
- Wide range of working temperature: -25°C to +50°C
- Intelligent MPP-Tracking
- Suitable to operate either indoor or outdoor (IP65)
- Fan-less through convection cooling
- RS232-communication
- wide communication equipment:  
Slots for RS-485 USB  
relays card or TCP/IP
- 5 years' warranty  
( optionally expandable to 10 years)
- G83/1 Compliant models


### Comfortable multifunction panel

1. LCD-display
2. Warning-LED grounding failure
3. Warning-LED supply failure
4. LED-display supply OK
5. Access functions
6. Click back
7. Click forward
8. Confirm

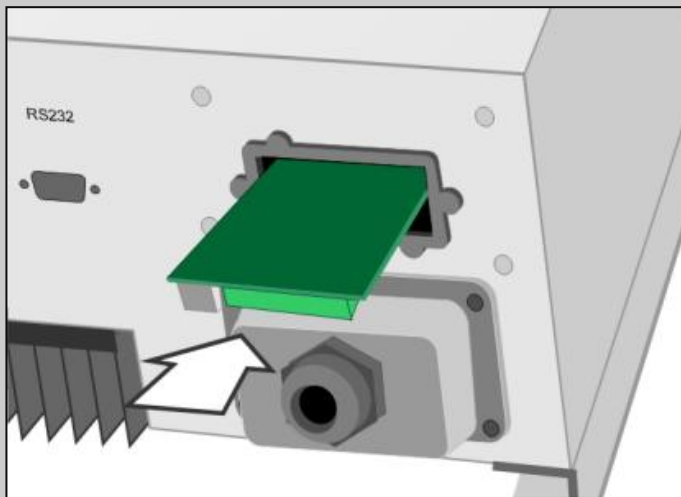


Slot for optional communication cards

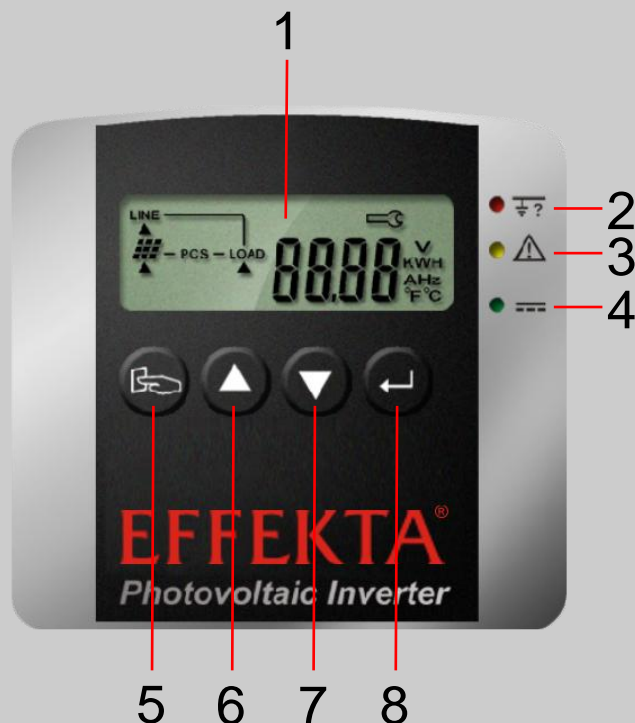

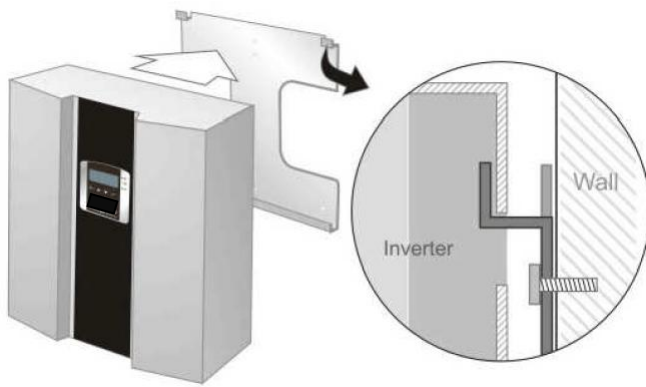

Easy and secure mounting with carrier plate

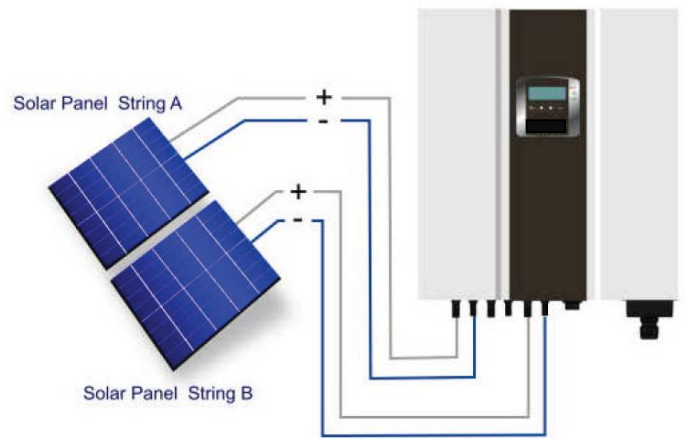

Sample configuration:  
DC-connection clamp for one 2-String-PV-array

# Specifications

Model		ES2200	ES3300	ES4200	ES5000
<b>Inverter-technology</b>	Implementation	sine-wave, current source, change-/ high-frequency PWM			
	Isolation method	version without transformer*			
<b>DC-input</b>	Nominal voltage	360V <sub>DC</sub>			
	Max. input voltage	500V <sub>DC</sub>			
	Operating voltage	120V <sub>DC</sub> to 500V <sub>DC</sub> **			
	Max. current (each MPP-Tracker)	14.6A	22A	14A	17.65A
	MPPT range	150V <sub>DC</sub> to 450V <sub>DC</sub>			
	MPPT tracker	1		2	
<b>AC-output</b>	Nominal power	2000	3000	4000	4600
	Max. power	2200	3300	4200	5300
	Nominal voltage	230V <sub>AC</sub> adjustable on 200/208/220/230/240			
	Form of the output connection	1-phase, mains connection (L, N, PE)			
	Voltage range	184V <sub>AC</sub> to 264.5V <sub>AC</sub> (basic 230V <sub>AC</sub> )			
	Nominal current	8.69A	13A	17.7A	21.7A
	Frequency	50/60Hz, auto select			
	Power factor	>0.99 with nominal AC			
	Harmonic distortion	total harmonic distortion: under 5% single harmonic distortion: under 3%			
<b>Efficiency</b>	Max. efficiency	96%			
	EURO efficiency	94%			
	CEC efficiency	94%			
<b>Environment</b>	Operating temperature	-25°C up to +50°C (-13°F up to 122°F)			
	Humidity	0 to 90% (without condensation)			
	Audible noise	< 45dBA			
<b>Mechanic</b>	Dimensions (H x W x D in mm)	455 x 430 x 170		455 x 510 x 170	
	Weight (kg)	27		29	
	Enclosure	IP65, outdoor operating			
	Cooling	convection			
	AC connection	terminal			
	DC connection	multiple, pluggable			
<b>Communication</b>	Standard	RS232			
	Optional	USB, RS485, potential free contact, TCP/IP			
<b>Front panel</b>	LCD	input DC voltage / input DC current / input DC current capacity / output AC voltage / output AC current / output frequency / output AC current capacity / energy output / inside temperature/ cooling body temperature / status signal / failure signal			
	LED	red:	grounding failure or DC-input isolation failure		
	green:	supply conditions are not comply with input values of photovoltaic inverter solar cell energy is higher or lower than 5 % of nominal capacity of the photovoltaic inverter			
<b>Safety</b>	Keyboard	up button / down button / function button / enter-button			
	Mains supply	over-/under voltage, over-/under frequency, grounding failure, DC-input isolation failure, off-grid operation			
	Short circuit	AC input: input diode / electronically switching AC output: output relay / electronically switching			
	EPO	photovoltaic inverter switches off immediately			
<b>Certification</b>	Over temperature	≤ 50°C (122°F) at full power / ≥ 50°C (122°F) at reduced power			
	Safety	Europe VDE0126-1-1, EN50178, IEC62103, G83/1 Compliant (ES2200 & 3300)			
	EM/EMC	EN 61000-6-1, EN 61000-6-2, EN 61000-6-3, EN 61000-6-4			

\* no galvanic isolation – note installation introduction of the solar-panel manufacturer.

\*\* nominal range should be from 150V<sub>DC</sub> up to 500V<sub>DC</sub>, to achieve the nominal capacity.